

CA 1006 Industrial thermocouple flanged to ANSI or DIN 43772 2F, 3F

Protection tube

Construction	Closed-end tube, diameter 9mm Optional 11mm, 12mm or 14mm
Material	SS 316 - (Wst 1.4401)
Insertion length "L"	Customer to specify
Process connection	Welded flange, size to be specified
Extension length "X"	Customer to specify

Connection head

Model	"B" according DIN 43729
Material	Cast aluminium
Cable entry	M20 x 1.5 cable gland

Measuring insert

Type	MI 1025 Replaceable springloaded dia 6 mm
Length "E"	$E = L + X + 35 \text{ mm}$
Material	SS 316 - (Wst 1.4401)

Thermocouple

Calibration	K, T, J, E, N, U or L
For duplex	KK, TT, JJ, EE, NN, UU or LL
Accuracy	According IEC 584-1 / DIN 43710

Options


Transmitter 4-20mA	In-Head Transmitter, standard or ATEX Explosion proof. Please select from our standard range, see "transmitter" chapter, specify make, model and range.
Swing-Cover head	DAN. Transmitter direct mounted on measuring insert
High Swing-Cover head	DAN-H. Transmitter in cover. Insert with ceramic block

Thermokoppel kleurcodes

Thermocouple Extension Type	ANSI	IEC
JX + Iron - Constantan ®		
KX + Chromel ® - Alumel ®		
TX + Copper - Constantan ®		
EX + Chromel ® - Constantan ®		
NX + Nicrosil ® - Nisil ®		
SX + Copper - Alloy 11		
BX + Copper-S - Copper-E		

Toleranties volgens IEC 584-2

Type	Class	Temperature range	Fixed value °C	Tolerance to temp. t (°C)
T	1	- 40°C to + 350°C	± 0,5	± 0,004 · t
	2	- 40°C to + 350°C	± 1	± 0,0075 · t
	3	- 200°C to + 40°C	± 1	± 0,015 · t
E	1	- 40°C to + 800°C	± 1,5	± 0,004 · t
	2	- 40°C to + 900°C	± 2,5	± 0,0075 · t
	3	- 200°C to + 40°C	± 2,5	± 0,015 · t
J	1	- 40°C to + 750°C	± 1,5	± 0,004 · t
	2	- 40°C to + 750°C	± 2,5	± 0,0075 · t
	3	-	-	-
K and N	1	- 40°C to + 1000°C	± 1,5	± 0,004 · t
	2	- 40°C to + 1200°C	± 2,5	± 0,0075 · t
	3	- 200°C to + 40°C	± 2,5	± 0,015 · t
R and S	1	0°C to + 1600°C	± 1,0	± [1+0,003 · (t-1100)]°C
	2	0°C to + 1600°C	± 1,5	± 0,0025 · t
	3	-	-	-
B	1	-	-	-
	2	+ 600°C to + 1700°C	± 1,5	± 0,0025 · t
	3	+ 600°C to + 1700°C	± 4	± 0,005 · t

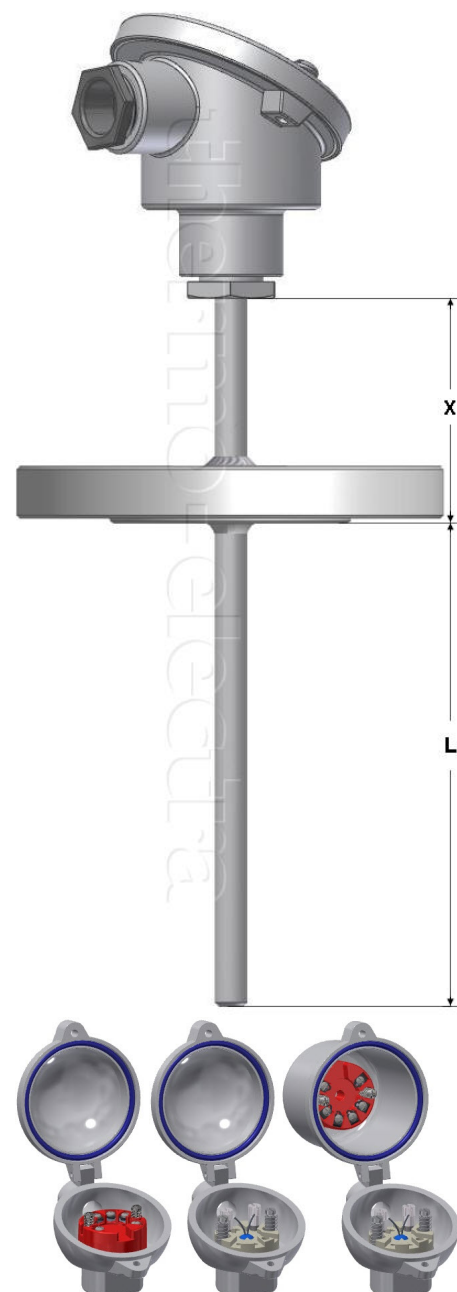

Ordering code

Model	CA 1006				
Calibration					
Insertion length "L" in mm					
Extension length "X" in mm					
Flange size/rating					

H1-1 Rev.0 7/07



thermo-electra
temperature sensor solutions

Thermo Electra B.V.
Weteringweg 10
2641KM Pijnacker
The Netherlands

Phone +31 (0)15 - 3621200
Fax +31 (0)15 - 3694082
Email sales@thermo-electra.com
http://www.thermo-electra.com

